

Pneumatic, Pressure-Control, On-Off Deluge Valve

Model: 400Y - 4DC

The BERMAD model 400Y-4DC is an elastomeric hydraulic, line pressure operated, deluge valve, designed specifically for advanced fire protection systems and the latest industry standards. The 400Y-4DC is activated by a pneumatic relay valve. Opening and closing of the valve can be controlled remotely. An integrated pressure reducing pilot valve ensures a stable and precise pre-set downstream water pressure. The 400Y-4DC is suitable for open-nozzle systems with a high pressure water supply and/or relatively low flow. The pneumatic control makes the 400Y-4DC suitable for freezing environments and /or corrosive water supplies.



Benefits and Features

- **Safety and reliability**
 - Time-proven, simple, fail-safe actuation
 - Single-piece, rugged, elastomeric diaphragm seal - VRSD technology
 - Obstacle-free, uninterrupted flow path
 - No mechanical moving parts
 - Shuts off on remote command
 - Ensures precise, stable downstream water pressure
 - Valve position limit switches
- **High performance**
 - Very high flow efficiency
 - Straight-through-flow Y-type body
 - Approved for PN25 (365 psi)
- **Designed for fire protection**
 - Face-to-face length standardized to ISO 5752, EN 558-1
 - Suitable for corrosive fluids and freezing temperatures: pneumatic relay valve
 - Designed to meet the requirements of the industry standards
- **Quick and easy maintenance**
 - In-line serviceable
 - Quick cover removal without detaching control trim*
 - Swivel mounted drain valves*

* not including 1½" & 2" valves

Typical Applications

- Fusible plug loops
- Automatic water spray systems
- Foam applications
- Corrosive water supplies
- High pressure water supply
- Freezing conditions

Approvals



UL-Listed
Special System Water Control
Valves Deluge Type (VLFT)



Det Norske Veritas
Type Approval



ABS
American Bureau of Shipping
Type Approval




Lloyd's Register
Type Approval

Factory Fitted Options

- Valve position limit switches
- Stainless steel seat ring
- Alarm pressure switch
- Air maintenance device
- Sea water compatibility
- Downstream drain valve

BERMAD Fire Protection




Model: FP 400Y - 4DC


400Y Series

Operation

(for Illustration Only)

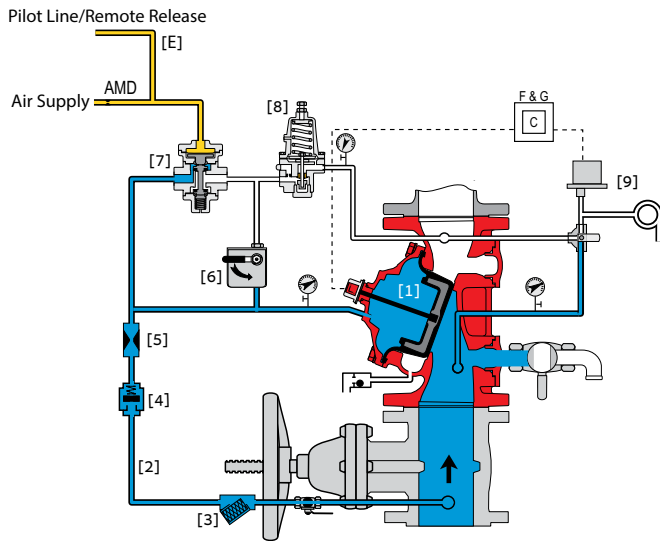

Valve Closed (normal conditions)

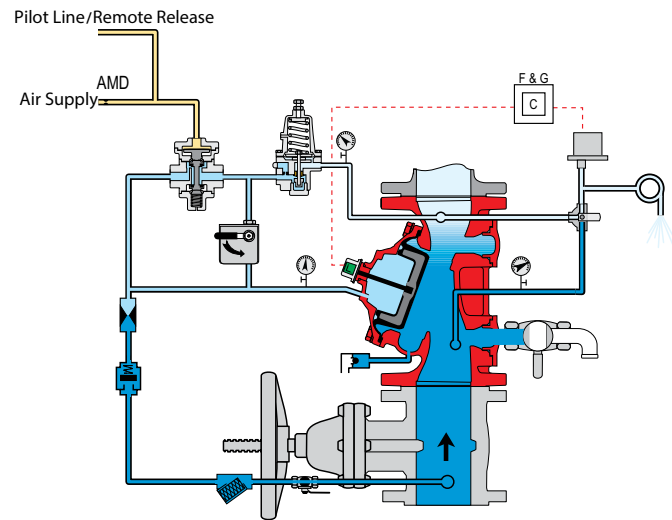


Valve Open (fire conditions)

The BERMAD model 400Y-4DC is held closed by water pressure in the control chamber [1]. Upon release of pressure from the control chamber, the valve opens. Under NORMAL conditions, water pressure is supplied to the control chamber via the priming line [2] strainer [3] and restriction orifice [5], it is then trapped in the control chamber by a check valve [4], manual emergency release [6], and a relay valve (URV) [7] that is held closed by pneumatic pressure in the dry pilot line [E]. The water pressure trapped in the main valve control chamber holds the diaphragm against the valve seat, sealing it drip-tight and keeping the system pipes dry. Under FIRE conditions, water pressure is released from the control chamber, either with the manual emergency release, or by the URV opening automatically in response to a decrease in pneumatic pilot-line pressure. This opens the 400Y-4DC deluge valve, allowing water to flow into the system piping and to the alarm device [9]. The pressure-reducing pilot valve [8] senses changes in outlet pressure and, modulates the main valve to maintain the set downstream pressure.

When outlet pressure changes, the pressure-reducing pilot opens or closes in response. This regulates the pressure in the main valve's control chamber, thus modulating the position of the diaphragm seal disk to maintain the set downstream pressure.

System P&ID

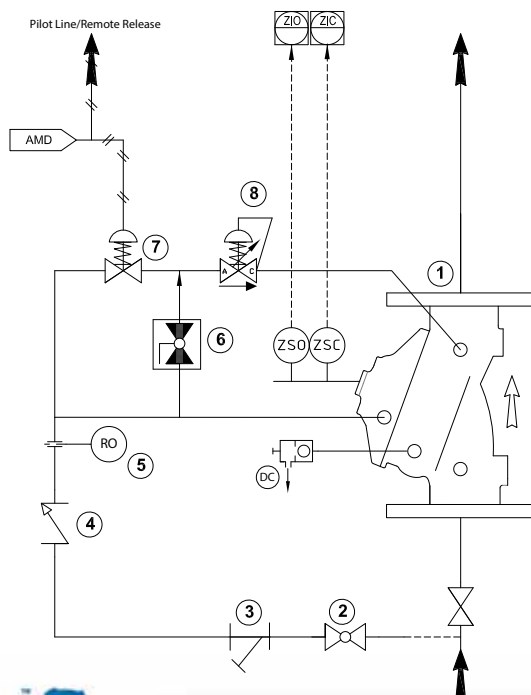


Components

- 1 BERMAD 400Y Deluge Valve
- 2 Priming Ball Valve
- 3 Priming Strainer
- 4 Check Valve
- 5 Restriction Orifice
- 6 Manual Emergency Release
- 7 URV, Pilot Valve
- 8 Pressure Reducing Pilot Valve

Factory fitted options

- ZS Limit Switch Assembly
- AMD Air Maintenance Device
- DC Automatic Drip Check Valve



System Installation

A typical installation of the BERMAD model 400Y-4DC features automatic actuation via a pneumatic universal relay valve, triggered by a fusible plug loop. When open, the valve sends a feedback signal to the remote valve position monitoring system. A pressure reducing pilot valve ensures precise, pre-set, stable downstream water pressure.

Factory Fitted Options



Water Motor Alarm



Pressure Switch




Limit Switch



Air Maintenance Device



Strainer

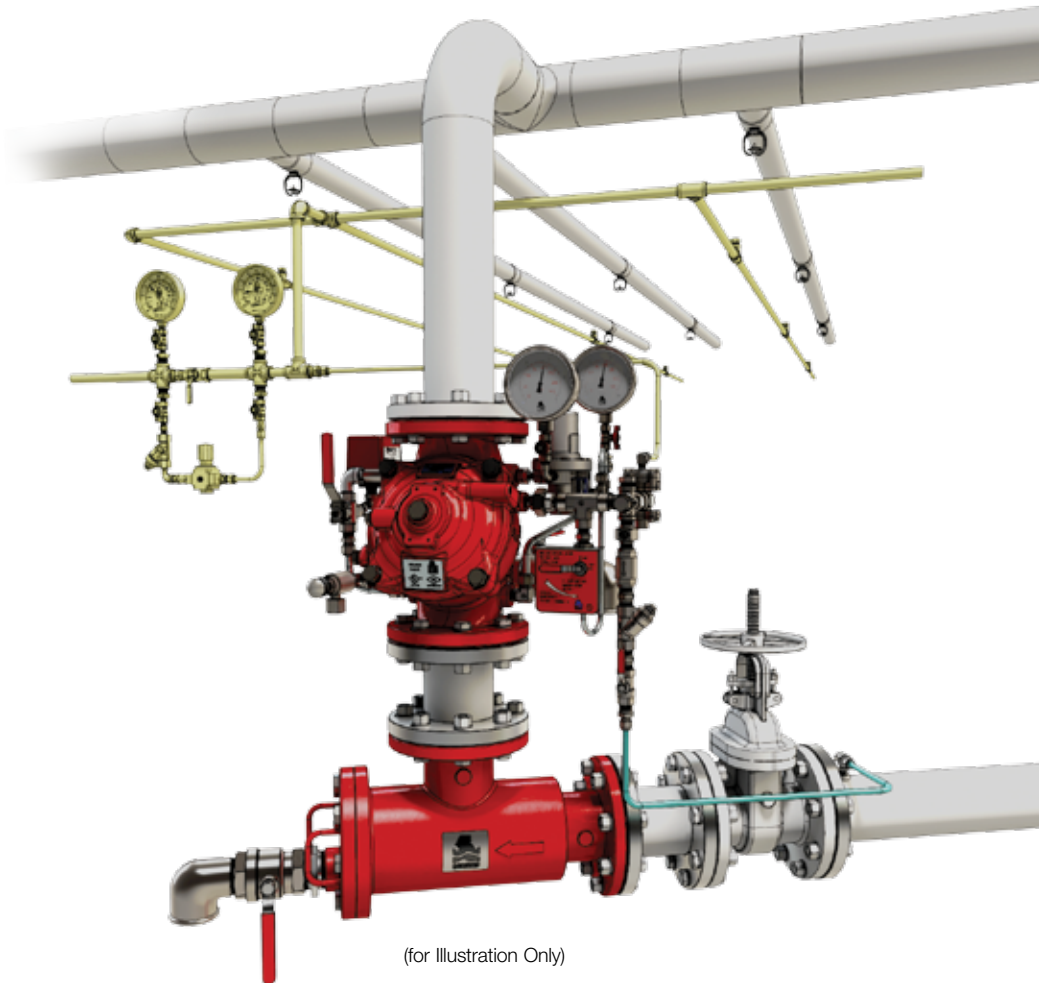

(for Illustration Only)

Suggested Specifications:

The deluge valve shall be a UL listed, 25 bar/365 psi rated, elastomeric-type, straight-through, Y-type-body valve.

The valve shall have an unobstructed flow path, with no stem guide or supporting ribs.

Valve actuation shall be accomplished by a single-piece, rolling diaphragm bonded with a rugged radial seal disk.

The diaphragm assembly shall be the only moving part.


The deluge valve shall include a relay pilot valve, a pressure reducing pilot valve, a Y-type strainer, a ball drain valve, an automatic drip-check with manual override, 4-inch pressure gauges, and a manual emergency release housed in a stainless steel box. The valve drain socket shall be flanged and have 360-degree swivel.

The valve shall be equipped with two limit switches.

Removing the valve cover for inspection and maintenance shall not require removing the control trim.

The deluge valve and its entire control trim shall be supplied pre-assembled and hydraulically tested by a factory certified to ISO 9000 and 9001 standards.

BERMAD Fire Protection



Model: FP 400Y - 4DC

400Y Series

Technical Data

Available Sizes (inch)



- Flanged - 1½, 2, 3, 4, 6, 8, 10, 12, 14 & 16"
- Grooved - 2, 3, 4, 6 & 8"
- Threaded - 1½ & 2"

Pressure Rating

- ANSI#150 - 16 bar / 235 psi
- ANSI#300 - 25 bar / 365 psi
- Grooved - 25 bar / 365 psi
- Threaded - 25 bar / 365 psi

Temperature Rating

- 60°C / 140°F with NR elastomers (standard)
- 90°C / 194°F with EPDM elastomers

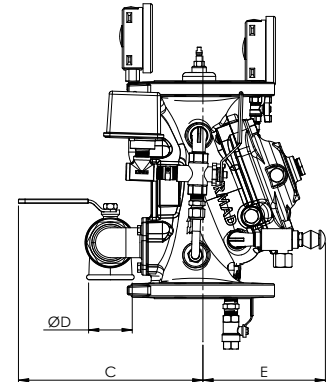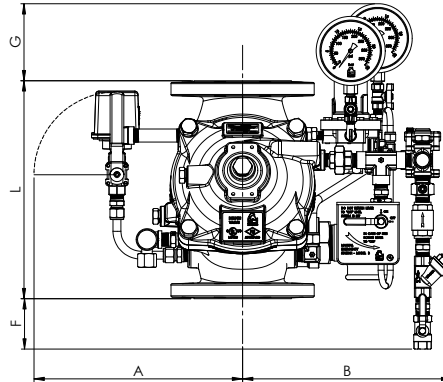


Valve Size	1½" DN40	2" DN50	3" DN80	4" DN100	6" DN150	8" DN200	10" DN250	12" DN300	14" DN350	16" DN400
⁽¹⁾ L ¹ ANSI #150 mm (in.)	230(9.06)	230(9.06)	310(12.21)	350(13.79)	480(18.91)	600(23.64)	730(28.76)	850(33.49)	980(38.61)	1100(43.34)
L ² ANSI #300 mm (in.)	230(9.06)	235(9.25)	326(12.84)	368(14.50)	506(19.94)	626(24.66)	730(28.76)	850(33.49)	980(38.61)	1100(43.34)
A mm (in.)	304(12)	304(12)	364(14.3)	372(14.6)	425(16.7)	455(18)	455(18)	568(22.4)	568(22.4)	568(22.4)
B mm (in.)	269(10.6)	269(10.6)	327(12.9)	337(13.3)	392(15.5)	420(16.6)	420(16.6)	533(21)	533(21)	533(21)
C mm (in.)	241(9.5)	241(9.5)	274(10.8)	290(11.4)	304(12.0)	320(12.6)	320(12.6)	383(15.1)	383(15.1)	408(16.1)
D mm (in.)	¾"	¾"	1½"	2"	2"	2"	2"	2"	2"	2"
E mm (in.)	120(4.7)	120(4.7)	146(5.7)	158(6.2)	228(9.0)	295(11.6)	295(11.6)	441(17.4)	441(17.4)	415(16.3)
F mm (in.)	179(7)	179(7)	109(4.3)	82(3.3)	0.5(0.02)	-	-	-	-	-
G mm (in.)	146(5.7)	146(5.7)	136(5.35)	123(4.8)	74.5(2.9)	50(2)	-	-	-	-
Kv m ³ /h (Cv gpm)	68(79)	80(92)	190(219)	345(398)	790(912)	1160(1340)	1355(1652)	2600(3040)	2950(3450)	3254(3801)
⁽²⁾ Leq m (ft)	2(6)	4(14)	8(25)	8(25)	13(43)	27(89)	55(179)	40(128)	66(215)	115(370)
Weight, flanged kg (lbs)	19.3(42.5)	20.7(45.6)	35.4(78)	45.4(100)	88.7(195)	151.9(335)	181.9(400)	324.9(713)	357.9(786)	403.9(888)

Notes: ⁽¹⁾ L¹ Dimensions are for grooved, threaded and raised face flanged valves

⁽²⁾ Leq: Equivalent pipe length for turbulent flow in clean commercial steel pipe (SCH 40)

Valve Code Designations

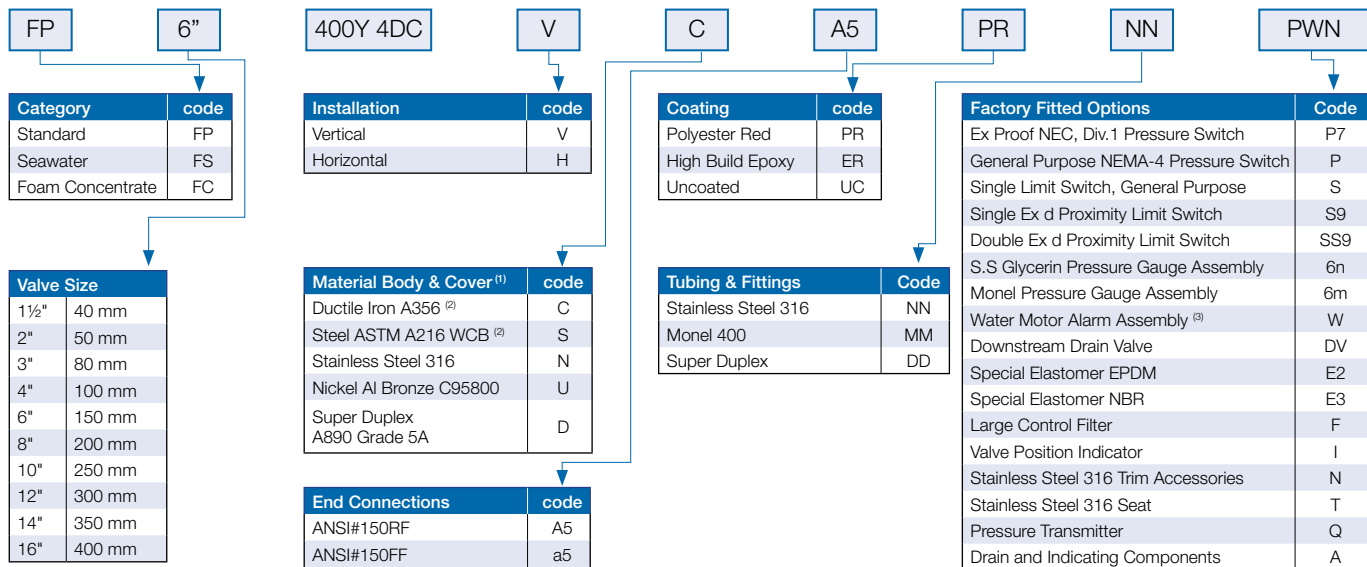

Notes:

⁽¹⁾ Other materials available see engineering data

⁽²⁾ Coated internally and externally

⁽³⁾ Supplied loose



bermadfire@bermad.com • www.bermad.com

© Copyright 2007-2012 Bermad CS Ltd. All Rights Reserved. The information contained in this document is subject to change without notice. BERMAD shall not be liable for any errors contained herein. PEYPE14-4DC 3/15 Rev. 1