

## Electro-Pneumatically Controlled On-Off Deluge Valve

### Model: 400Y - 6D

The BERMAD Model 400Y-6D is an elastomeric, hydraulic line pressure operated deluge valve, designed specifically for advanced fire protection systems and the latest industry standards.

The 400Y-6D is activated by a 3-Way solenoid valve which in turn activates a pneumatic relay valve. It can also be activated by a pressure decrease in the pneumatic pilot line. Opening or closing of the valve can be performed remotely. The 400Y-6D is ideal for open-nozzle systems and is available with electrical components to suit any hazardous location.



### Benefits and Features

- **Safety and reliability**
    - Time-proven, simple, fail-safe actuation
    - Single-piece, rugged, elastomeric diaphragm seal – VRSD technology
    - Obstacle-free, uninterrupted flow path
    - No mechanical moving parts
    - Shuts off on remote command
    - Valve position limit switches
    - Local valve position indicator beacon
  - **High performance**
    - Very high flow efficiency
    - Minimal head loss: straight-through Y-type body
    - Approved for PN25 / 365 psi
  - **Designed for fire protection**
    - Face-to-face length standardized to ISO 5752, EN 558-1
    - Suitable for corrosive fluids: pneumatic solenoid valve
    - Meets the requirements of the industry standards
  - **Quick and easy maintenance**
    - In-line serviceable
    - Quick cover removal without detaching control trim\*
    - Swivel mounted drain valves\*
- \* not including 1½" & 2" valves

### Typical Applications

- Fusible plug loops
- Automatic water spray systems
- Foam applications
- Corrosive water systems
- Dual redundant detection systems

### Approvals



**UL-Listed**  
Special System Water Control  
Valves Deluge Type (VLFT)



**Det Norske Veritas**  
Type Approval



**ABS**  
American Bureau of Shipping  
Type Approval




**Lloyd's Register**  
Type Approval

### Factory Fitted Options

- Valve position limit switches
- Local valve position indicator beacon
- Alarm pressure switch
- Air maintenance device
- Sea water compatibility
- Stainless steel seat ring
- Downstream drain valve

# BERMAD Fire Protection




Model: FP 400Y - 6D


400Y Series

## Operation

(for Illustration Only)

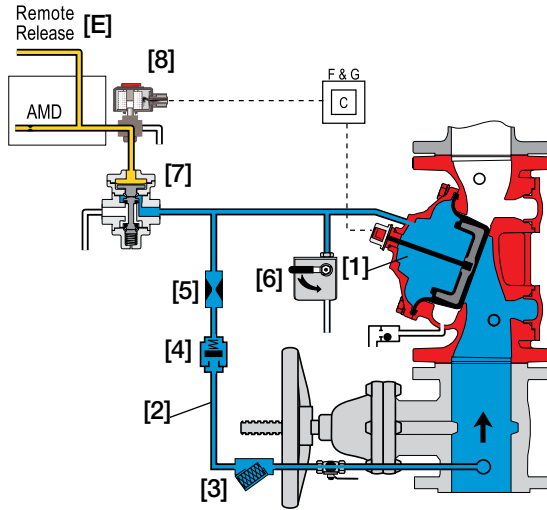


**Valve Closed** (normal conditions)

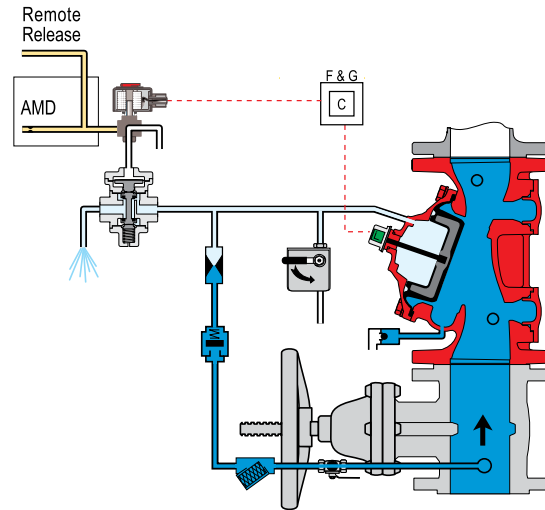

**Valve Open** (fire conditions)

The BERMAD model 400Y-6D is held closed by water pressure in the control chamber [1]. Upon release of pressure from the control chamber, the valve opens. Under NORMAL conditions, water pressure is supplied to the control chamber via the priming line [2] strainer [3], and restricted orifice [5] it is then trapped in the control chamber by a check valve [4], manual emergency release [6], and a relay valve (URV) [7] that is held closed by pneumatic pressure supplied through a three-way solenoid valve [8]. The water pressure trapped in the main valve control chamber holds the diaphragm against the valve seat, sealing it drip-tight and keeping the system pipes dry. Under FIRE conditions, water pressure is released from the control chamber, either with the manual emergency release, or by the URV opening automatically. The URV opens in response either to a decrease in pneumatic pilot-line [E] pressure or to the solenoid valve being activated by the fire & gas control system [C]. This opens the 400Y-6D deluge valve, allowing water to flow into the system piping.

## System P&ID

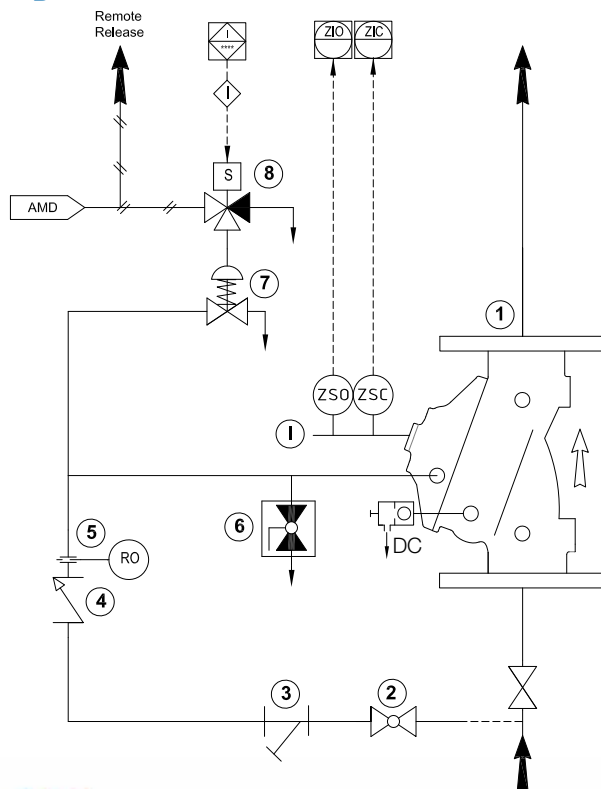


### Components

- 1 BERMAD 400Y Deluge Valve
- 2 Priming Ball Valve
- 3 Priming Strainer
- 4 Check Valve
- 5 Restriction Orifice
- 6 Manual Emergency Release
- 7 URV, Pilot Valve
- 8 3-Way NC Solenoid Valve

### Factory fitted options

- ZS Limit Switch Assembly
- I Visual Indicator
- AMD Air Maintenance Device
- DC Automatic Drip Check Valve







## System Installation

A typical installation of the BERMAD model 400Y-6D features automatic actuation via a pneumatic universal relay valve, triggered by a fusible plug loop. The valve can also be triggered electrically by a signal from a fire & gas control system or an on-site emergency pushbutton. When fitted with a limit switch, the valve sends a feedback signal to the remote valve position monitoring system.

## Factory Fitted Options

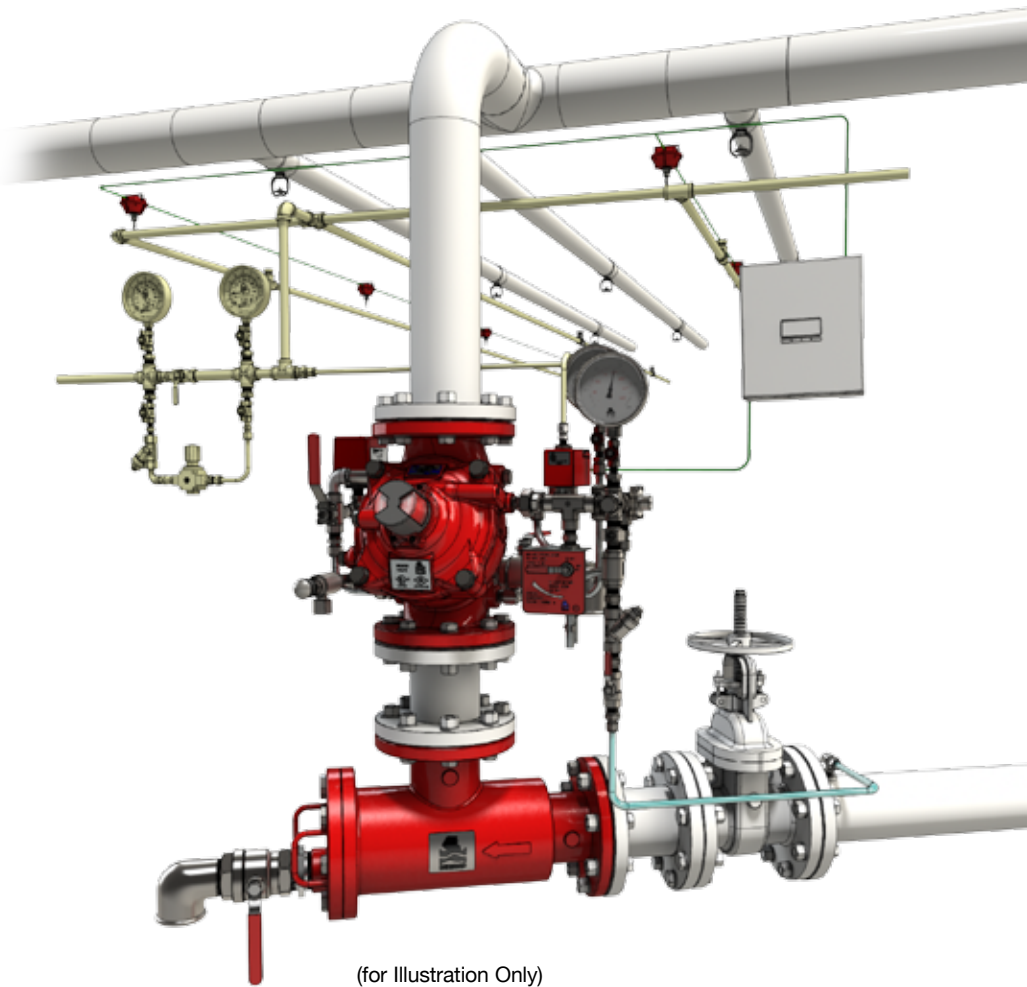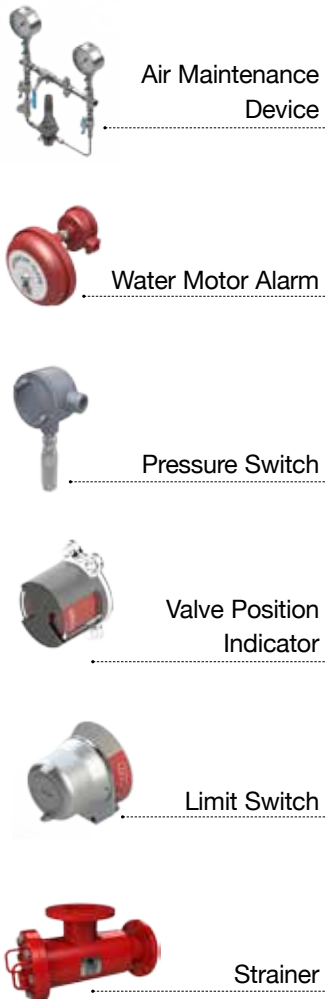

## Suggested Specifications:

The deluge valve shall be a UL listed, 25 bar/365 psi rated, elastomeric-type, straight-through, Y-type-body valve.


The valve shall have an unobstructed flow path, with no stem guide or supporting ribs.

Valve actuation shall be accomplished by a single-piece, rolling diaphragm bonded with a rugged radial seal disk.

The diaphragm assembly shall be the only moving part. The deluge valve shall include a relay pilot valve, a 3-way solenoid valve with a 35% tolerance below the rated voltage, a Y-type strainer, a ball drain valve, an automatic drip-check with manual override, 4-inch pressure gauges, and a manual emergency release housed in a stainless steel box. The valve drain socket shall be flanged and have 360-degree swivel.

The valve shall be equipped with a protective-covered, dual-color, rotational position indicator, readable from 50 meters, and with two limit switches enclosed in a protective switch box. Removing the valve cover shall be in-line and not require removal of the control trim. The deluge valve and its entire control trim shall be supplied pre-assembled and hydraulically tested by a factory certified to ISO 9000 and 9001 standards.

# BERMAD Fire Protection



Model: FP 400Y - 6D

400Y Series

## Technical Data

### Available Sizes (inch)


- Flanged - 1½, 2, 3, 4, 6, 8, 10, 12, 14 & 16"
- Grooved - 2, 3, 4, 6 & 8"
- Threaded - 1½ & 2"

### Pressure Rating

- ANSI#150 - 16 bar / 235 psi
- ANSI#300 - 25 bar / 365 psi
- Grooved - 25 bar / 365 psi
- Threaded - 25 bar / 365 psi

### Temperature Rating

- 60°C / 140°F with NR elastomers (standard)
- 90°C / 194°F with EPDM elastomers

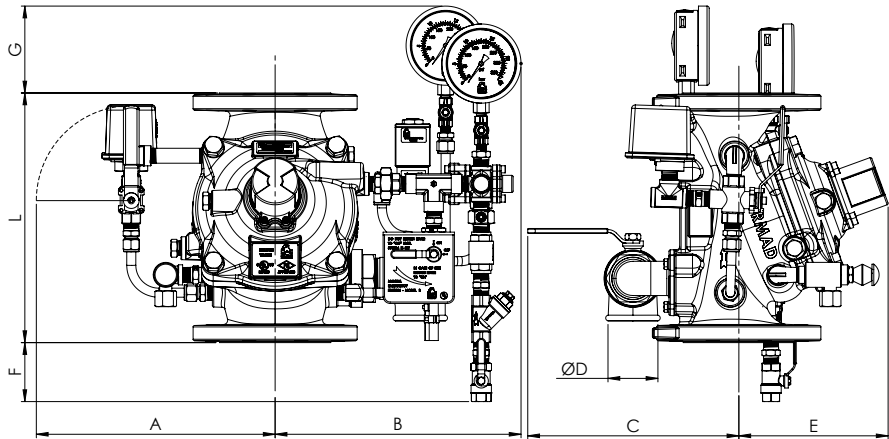


Valve Size	1½" DN40	2" DN50	3" DN80	4" DN100	6" DN150	8" DN200	10" DN250	12" DN300	14" DN350	16" DN400
<sup>(1)</sup> L <sup>1</sup> ANSI #150 mm (in.)	230(9.06)	230(9.06)	310(12.21)	350(13.79)	480(18.91)	600(23.64)	730(28.76)	850(33.49)	980(38.61)	1100(43.34)
L <sup>2</sup> ANSI #300 mm (in.)	230(9.06)	235(9.25)	326(12.84)	368(14.50)	506(19.94)	626(24.66)	730(28.76)	850(33.49)	980(38.61)	1100(43.34)
A mm (in.)	330(13.0)	330(13.0)	390(15.4)	398(15.7)	451(17.8)	481(18.9)	481(18.9)	594(23.4)	594(23.4)	594(23.4)
B mm (in.)	234(9.2)	234(9.2)	292(11.5)	302(11.9)	357(14)	385(15.1)	385(15.2)	498(19.6)	498(19.6)	498(19.6)
C mm (in.)	241(9.5)	241(9.5)	274(10.8)	290(11.4)	304(12.0)	320(12.6)	320(12.6)	383(15.1)	383(15.1)	408(16.1)
D mm (in.)	¾"	¾"	1½"	2"	2"	2"	2"	2"	2"	2"
E mm (in.)	167(6.6)	167(6.6)	191(7.5)	205(8.1)	273(10.7)	338(13.3)	338(13.3)	490(19.3)	490(19.3)	465(18.3)
F mm (in.)	184(7.2)	184(7.2)	114(4.5)	87(3.4)	5.5(0.2)	-	-	-	-	-
G mm (in.)	146(5.7)	146(5.7)	136(5.4)	123(4.8)	74.5(2.9)	50(2)	-	-	-	-
Kv m <sup>3</sup> /h (Cv gpm)	68(79)	80(92)	190(219)	345(398)	790(912)	1160(1340)	1355(1652)	2600(3040)	2950(3450)	3254(3801)
<sup>(2)</sup> Leq m (ft)	2(6)	4(14)	8(25)	8(25)	13(43)	27(89)	55(179)	40(128)	66(215)	127(413)
Weight, flanged kg (lbs)	15.26(33.5)	16.66(36.6)	31.36(69.0)	41.36(91.0)	84.66(186.3)	147.86(325.3)	177.86(391.3)	320.86(705.9)	353.86(778.5)	399.86(879.7)

Notes: <sup>(1)</sup> L<sup>1</sup> Dimensions are for grooved, threaded and raised face flanged valves

<sup>(2)</sup> Leq: Equivalent pipe length for turbulent flow in clean commercial steel pipe (SCH 40)

## Valve Code Designations

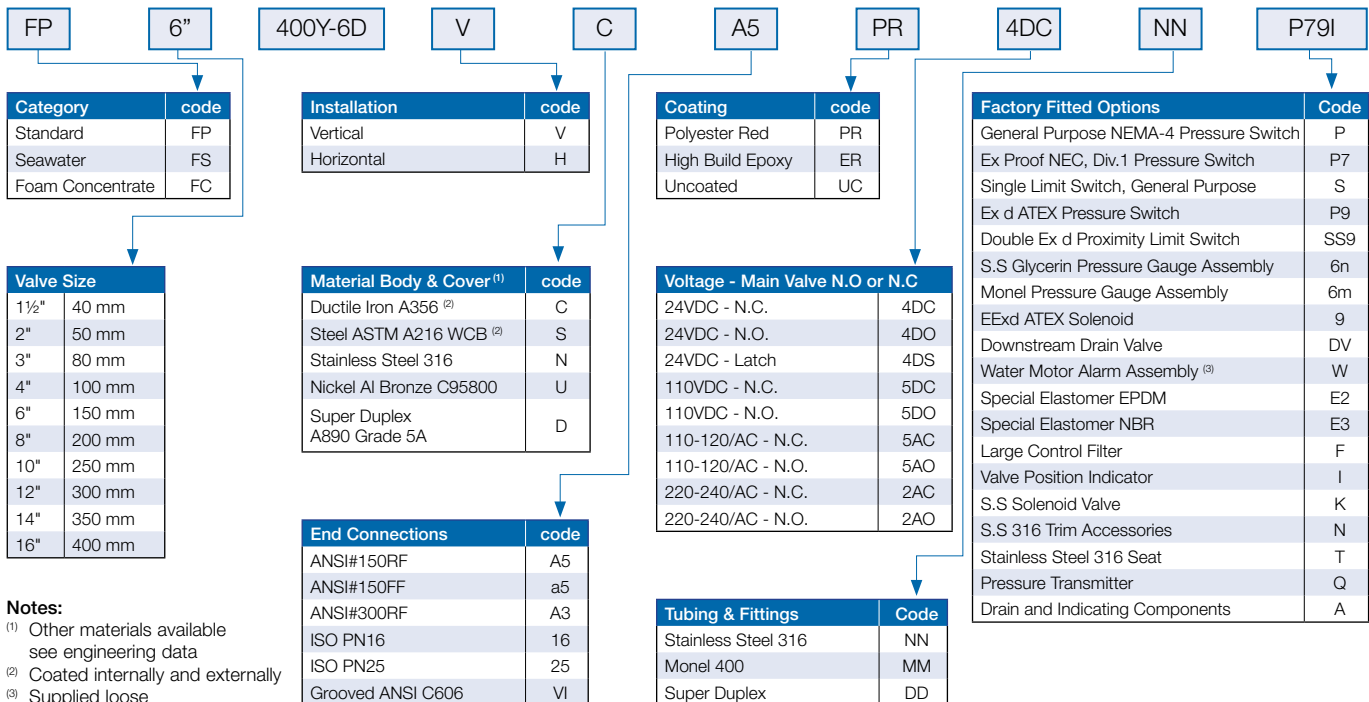

### Notes:

<sup>(1)</sup> Other materials available see engineering data

<sup>(2)</sup> Coated internally and externally

<sup>(3)</sup> Supplied loose



bermadfire@bermad.com • www.bermad.com

© Copyright 2007-2012 Bermad CS Ltd. All Rights Reserved. The information contained in this document is subject to change without notice. BERMAD shall not be liable for any errors contained herein. PEYPE14-6D 3/15 Rev. 1